

VIRGO Side-shift mulcher

HP 40-70 KW 29-51

More information / Download PDF



Suitable for cleaning ditches, road shoulders, meadows and gardens

Technical specifications and standard equipment

- maximum horsepower: 70 HP (51 KW)
- PTO: 1-Speed for 540 rpm: 2,454 rpm tip speed 43 m/s
- 3 belt transmission
- 3-point hitch cat. 2 with self-aligning hinge fixed
- fixed double counter-blades
- gearbox with freewheel safety device
- side skids and rear roller (ø 133 mm) for cutting height adjustment
- side-shift and tilt (angle) adjustment with hydraulic rams
- rotor (pipe ø 108 mm) with smooth hammers (ø 336 mm)
- resting foot

drive shaft without safety device

Optionalvaeuessories

.it/en/) • Drive shaft with wide-angle yoke

- L-shaped blades
- Toothed hammers

Ideal for:


- Working with small tractors
- Mulching grass and shoots
- Cultivating around trees in vineyards and orchards
- Cutting grass
- Cutting grass on slopes
- Carrying equipment on the roads without risks

Symbol key (https://www.celli.it/en/symbol-key/)

VIRGO Celli side-shift mulcher

| (https://www.celli | | | 6 -3 | 4-4 | T | |
|------------------------|-----|-----|-------------|------------|-----|---|
| · · · | cm | cm | HP / KW | Kg | Nr. | |
| .it/en/) 150 | 166 | 150 | 40/29 | 530 | 12 | Cardano S.6 L=1656 lato trattore 1"3/8 Z=6 |
| 165 | 181 | 165 | 45/33 | 555 | 14 | |
| 180 | 196 | 180 | 50/36 | 575 | 16 | |

| VIRGO | Α | В | С | C1 | D |
|-------|-----|-----|----|----|---------|
| | cm | cm | cm | cm | cm |
| 150 | 150 | 230 | 58 | 69 | 180/197 |
| 165 | 165 | 245 | 58 | 69 | 180/197 |
| 180 | 180 | 260 | 58 | 69 | 180/197 |

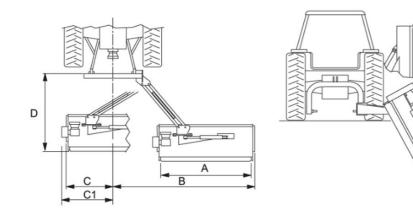

Previous « SCORPIO/P SUPER SCORPIO/P (https://www.celli.it/en/products/mulchers/scorpio-psuper-scorpio-p/)

> Next VIRGO SE » (https://www.celli.it/en/products/mulchers/virgo-se/)

90°

65

Request for information

Fill out the form to ask for information on the product pages