



Forestry mulcher for standard tractors or crawler tractor between 50 and 100 HP.

Suitable for the cleaning of brushwood, which favors the growth of trees, the reclamation of land, the maintenance and restoration of banks, the maintenance of areas under power lines, forestry roads, fire-blocking lines.

It incorporates rotor POLSER+ of 470 mm of diameter.


### CHARACTERISTICS

- ▶ Steel-plate chassis, thickness 8 mm.
- ▶ Rotor POLSER + of Ø 470 mm.
- ▶ Gearbox SERRAT.
- ▶ 3 XPC side belt transmission.
- ▶ Swinging 360° forged forestry hammers SERRAT or fixed tooth with tip in tungsten or blades DRR.
- ▶ Supports of bearing rotor in steel.
- ▶ Oscillating bearings of double row of rollers.
- ▶ Front protection curtain.
- ▶ PTO 540 rpm.
- ▶ System antiwire in rotor.
- ▶ Steel counter hammers.
- ▶ Front skid shoes.
- ▶ Rear hydraulic hood.
- ▶ Model built under EC Normative.
- ▶ Safety indicators visible to personnel.



Swinging hammers  
Hydraulic rear hood  
Pushing frame (option)

FIXE TOP System

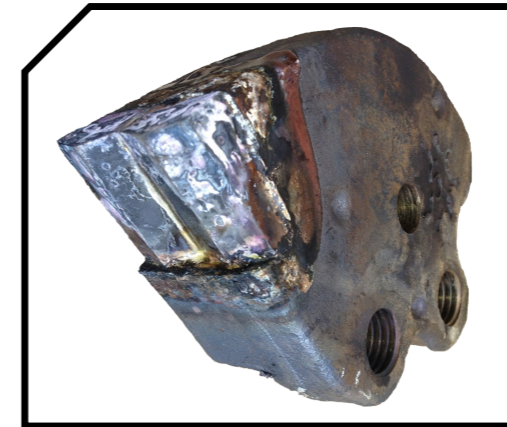

### MODEL

MODEL	mm	KW-HP	12	36	18	789	3 XPC	N° BELTS TYPE						
								A mm	A in	B mm	B in	C mm	C in	
T-1400	1400	37 - 50 75 - 100	12	36	18	789	3 XPC	1640	65"	1070	42"	970	38"	540
T-1600	1600	44 - 60 75 - 100	16	44	22	862	3 XPC	1840	72"	1070	42"	970	38"	540
T-1800	1800	52 - 70 75 - 100	16	50	24	924	3 XPC	2040	80"	1070	42"	970	38"	540
T-2000	2000	60 - 80 75 - 100	20	50	26	992	3 XPC	2240	88"	1070	42"	970	38"	540


### OPTIONS



▶ Freewheel on sleeve



▶ Freewheel on transmission

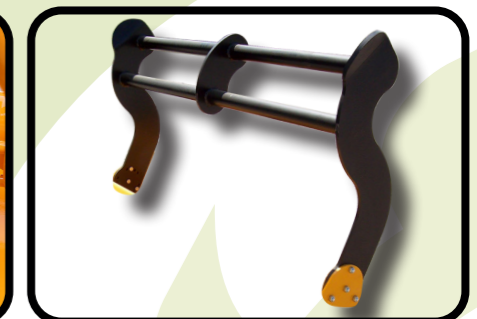

▶ Hydraulic or mechanic pushing frame

