




Offset Mulcher of high range, polyvalent, for works in agricultural margins, banks, highways, channels, roads and others clears of public works for tractor between 70 - 120 HP. It incorporates safety system thanks to a valve positionned in the cylinder of elevation of the arm. It has a rear hood with two positions. Angulation +90° / -65°. Rotor POLSER of 450 mm of diameter with hammer of high edge.

CHARACTERISTICS

- Steel-plate chassis, thickness 8 mm.
- Rotor POLSER of 450 mm. of diameter.
- Gearbox SERRAT.
- 3 XPC side belt transmission.
- Hammers guaranteed against breakage.
- GIROSTOP System.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- Front protection curtain.
- Double bearing on rear roller.
- Height-adjustable rear roller.
- PTO 750 rpm.
- Hydraulic displacement.
- Angulation +90° / -65°.
- Safety valve.
- Rear mechanical hood (2 positions).
- Model built under EC Normative.
- Safety indicators visible to personnel.



Hydraulic displacement

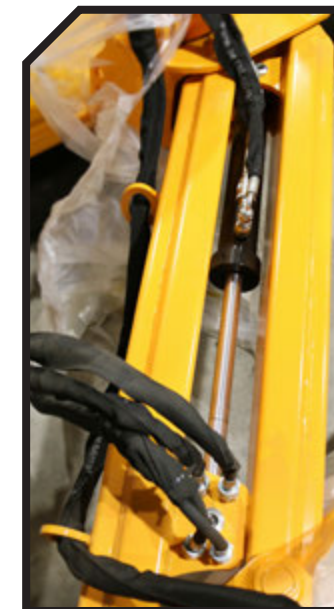

System antiwire in rotor



OPTIONS

Angulation: +90°



-65°



- Homokinetic knot

MODEL	mm	KW-HP				Nº BELTS TYPE							
							A	A	B	B	C	C	
	mm						mm	in	mm	in	mm	in	
T-1600	1600	51 - 70 88 - 120	12	24	736	3 XPC	1800	71"	1865	73"	1138	45"	750
T-1800	1800	59 - 80 88 - 120	16	28	776	3 XPC	2000	79"	1865	73"	1138	45"	750
T-2000	2000	59 - 80 88 - 120	16	32	805	3 XPC	2200	87"	1865	73"	1138	45"	750
T- 2300	2300	66 - 90 88 - 120	20	40	860	3 XPC	2525	99"	1865	73"	1138	45"	750

