



Mulcher with reversible hydraulic feeder, ideal for pruning of olive trees, citrus trees and nuts.

Adapted to crush residues from 8-10 cm of diameter, with the rotor ÓCLAME of SERRAT which is adapted for tractors between 90 and 140 HP.

It works in reverse to preserve the tractor for doesn't pass at the top of the branches.

CHARACTERISTICS


- Steel-plate chassis, thickness 10 mm.
- Rotor ÓCLAME of 550 mm of diameter.
- Gearbox SERRAT.
- Side belt transmission 4 XPC.
- Treated knives.
- Supports of bearing rotor in Steel.
- Oscillating bearings of double row of rollers.
- Double bearing on rear roller.
- PTO 1.000 rpm.
- Triple feed chain.
- High torque hydraulic motor reversible.
- Hydraulic feeder, system BRALAKC.
- Model built under EC Normative.
- Safety indicators visible to personnel.



Feeder Bralake



Rotor Óclame Technology

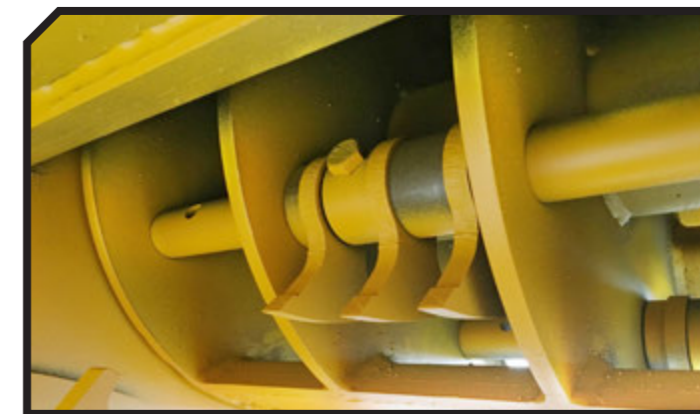

MODEL	mm	KW-HP	kg	Nº BELTS TYPE	Diagram							
					A mm	A in	B mm	B in	C mm	C in		
T-1600	1600	67 - 90 104 - 140	66	1.210	4 XPC	2090	82	1370	54	1260	50	1000
T-1800	1800	67 - 90 104 - 140	78	1.310	4 XPC	2290	90	1370	54	1260	50	1000
T-2000	2000	67 - 90 104 - 140	84	1.400	4 XPC	2490	98	1370	54	1260	50	1000

OPTIONS

• Freewheel on sleeve



• Steering Wheels

