



# IBP FRONTAL



Mulcher designed for tractors between 40 HP to 80 HP for the maintenance of vegetable mantle and for the elimination of remains of pruning up to 5 cm.


Special configuration for frontal works.

## CHARACTERISTICS

- Steel-plate chassis, thickness 6 mm.
- Tubular rotor of 400 mm of diameter.
- 2 lines of counter knives screwed in.
- Gearbox with freewheel included.
- Hydraulic rear hood.
- 4 XPB side belt transmission.
- Forged hammer SERRAT.
- Girostop System.
- Supports of bearing rotor in steel.
- Oscillating bearings of double row of rollers.
- PTO 540 rpm.
- Double bearing on rear roller.
- Model built under EC Normative.
- Safety indicators visible to personnel.



## Gearbox

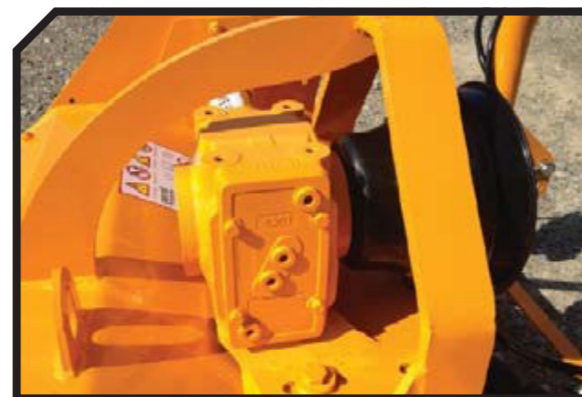

## Detail of the roller



## OPTIONS



- Hydraulic side shift

| MODEL  | mm   | KW-HP              | Icon | KG  | Nº BELTS TYPE | Dimensions |      |      |      |      |      |     |
|--------|------|--------------------|------|-----|---------------|------------|------|------|------|------|------|-----|
|        |      |                    |      |     |               | A mm       | A in | B mm | B in | C mm | C in |     |
| T-1400 | 1400 | 51 - 70<br>59 - 80 | 12   | 397 | 4XPB          | 1595       | 63"  | 1155 | 45"  | 840  | 33"  | 540 |
| T-1600 | 1600 | 51 - 70<br>59 - 80 | 12   | 420 | 4XPB          | 1795       | 71"  | 1155 | 45"  | 840  | 33"  | 540 |
| T-1800 | 1800 | 51 - 70<br>59 - 80 | 16   | 456 | 4XPB          | 1995       | 79"  | 1155 | 45"  | 840  | 33"  | 540 |



Carretera nacional 240 km. 149,3  
22310 Castejón del Puente (Huesca)-España  
Tfno. (+34) 974 417 830  
Fax. (+34) 974 410 059  
www.serrat.com - comercial@serrat.es

